

KLAU

BRUTALLY EFFECTIVE



MANUFACTURED IN ENGLAND

Tree Surgeons • Land Clearance Contractors

Landscapers • Hire Companies

Manual Swivel Log Grab

KLG1-MC • KLG1-M • KLG2-M

Manual Swivel Log Grab

KLG1-MC • KLG1-M • KLG2-M

The KLG1-MC, KLG1-M and KLG2-M are professional log grabs, robustly constructed for use with mini skid steers and mini articulated loaders. The simple but extremely strong design ensures high reliability by minimising the number of moving parts. It is useful for a range of tasks including:

- Handling of large logs
- Loading of brush into woodchippers
- Handling of posts, telegraph poles and stakes

The high gripping power of the grab, combined with the rigid mounting system, prevents the load from swinging during transit, maximising operator control and safety.



Mini Skid-Steers



Sit-in Skid-Steers



Tractor Front-end Loaders



Telehandlers



Mini Articulated Loaders



Manual Swivel Log Grab

KLG1-MC • KLG1-M • KLG2-M

Key Features



The large-bore ram maximises crushing power, and the pilot-operated check valve prevents the grab from opening without operator input, ensuring load retention.



The optional front-mounted tow-ball permits easy movement of trailers and trailed plant, without the need to change attachment.



The optional side-mounted capstan is a useful tie-point for ropes when dragging brush from hard-to-access areas.




The rear brace spreads forces evenly throughout the grab and carrier vehicle, and helps to prevent the load from shifting.



The hydraulic pipes are spiral-wrapped and routed through the centre of the grab, protecting them from scuff wear and catching on branches.



The practically unbreakable rigid swivel system prevents the load from swinging while in transit, maximising operator control and safety - particularly in confined spaces.

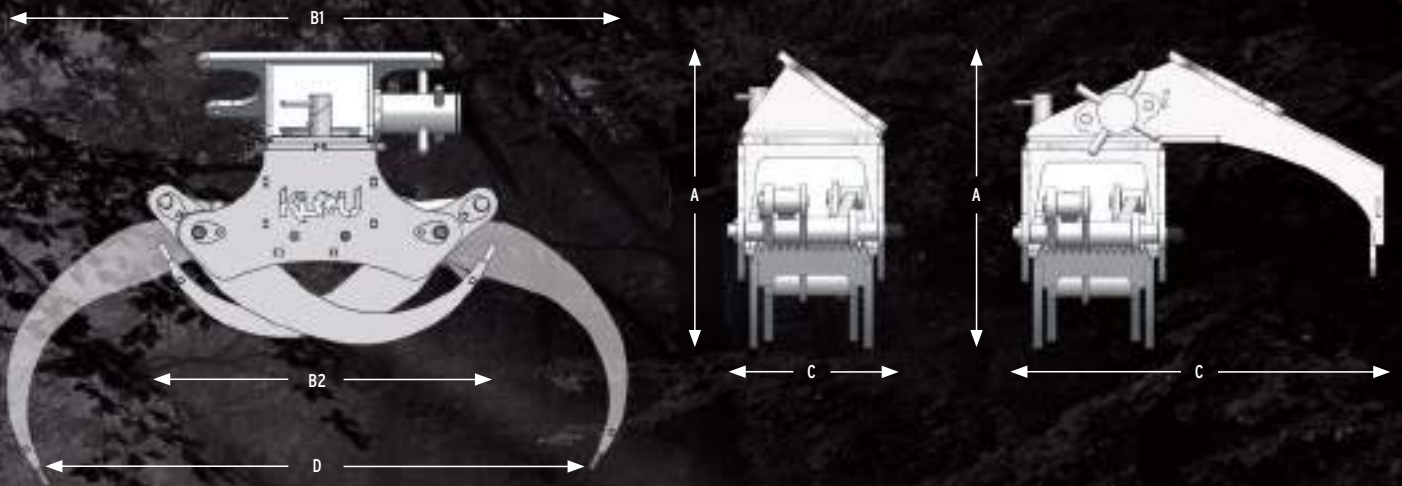

| Dimensions (exc tool grip, capstan, tow-ball) | KLGI-MC | KLGI-M | KLGI2-M |
|--|---------|--------|---------|
| A - Overall height (mm) | 505 | 520 | 730 |
| B1 - Overall width - open (mm) | 1105 | 1105 | 1370 |
| B2 - Overall width - closed (mm) | 625 | 625 | 800 |
| C - Overall length (mm) | 300 | 650 | 745 |
| D - Max. open width (mm) | 945 | 945 | 1160 |
| E - Min. closed diameter (mm) | 60 | 60 | 80 |
| Max. log diameter (mm) | 750 | 750 | 950 |
| Overall weight (kg) | 105 | 125 | 180 |

| Hydraulic service requirements | KLGI-MC | KLGI-M | KLGI2-M |
|------------------------------------|---------|---------|---------|
| Min/max flow (litres/min) | 15/60 | 15/60 | 20/75 |
| Min/max pressure (bar) | 150/250 | 150/250 | 150/250 |
| Case drain required? | No | No | No |
| Pressure free return line required | No | No | No |

KLGI-MC does not have rear brace in order to reduce size for use with small loaders

Klou UK operates a policy of continuous development and improvement - all specifications are therefore subject to change without notice