



Bull blade on loader



STANDARD




STANDARD 2.50 m with side flaps option

Technical characteristics

MODELS	LIGHT 1,50 m	LIGHT 2,00 m	STANDARD 2,00 m	STANDARD 2,50 m	BULL 2,00 m	BULL 2,50 m
Coupling	3-point linkage n°1 and 1N		3-point linkage n°1 and 2		According to carrier	
Blade width	1,50 m	2,00 m		2,50 m	2,00 m	2,50 m
Tractor power	max. 50 HP		70 up to 90 HP			
Total weight (without option)	168 kg	189 kg	460 kg	508 kg	407 kg	438 kg
Height	0,43 m		0,50 m			
Ø swivelling axle	70 mm		80 mm			
Blade rotation	360°		+/- 45° (mechanical)			
Offset	0°		20° right / 29° left (mechanical)		0°	
Tilting	0°		+/- 20°			

- Allows many applications :
 - Levelling dirt and forest roads,
 - Cleaning of yards, loose stalls and roads,
 - Backfilling ditches and drainage trenches,
 - Ditch creation and cleaning,
 - Earthworks and levelling,
 - Snow removal.
- Upgradeable range with numerous options.
- Interchangeable wear knife made of special steel.
- More movements : tilting, rotation and offset (no offset and tilting on LIGHT blade) with simple adjustments (no tools required).
- More robustness for intensive work : frame design with rounded, thick beam (on model STANDARD and HEAVY DUTY).



MODELS	Price	Reference	Price	Reference
	LIGHT 1,50 M		LIGHT 2,00 M	
LIGHT BLADE 3-point linkage category 1 and 1N	2530.00	70968A	2735.00	70965A
OPTIONS				
Snow blade	215.00	70970A	215.00	70912A
Depth control wheels - 1 set of 2 (400 x 200 mm)	735.00	70945A	735.00	70945A
Side flaps (1 set of 2)	275.00	70956A	275.00	70956A

MODELS	Price €	Reference	Price €	Reference
	STANDARD 2,00 M		STANDARD 2,50 M	
STANDARD BLADE 3-point linkage category 1 & 2	4565.00	70929A	4890.00	70938A
OPTIONS				
Hydraulic offset (+/- 29°)	960.00	70959A	960.00	70959A
Hydraulic tilting (+/- 20°)	960.00	70955A	960.00	70955A
Hydraulic rotation (34° right / 41° left)	1195.00	70908A	1195.00	70908A
Hydraulic valve dual-acting with support, hydraulic hoses	1-way valve dual-acting	565.00	70939A	565.00
	2-way valve dual-acting	705.00	70940A	705.00
	3-way valve dual-acting	870.00	70941A	870.00
Extension 25 cm	Right	525.00	70906A	525.00
	Left	525.00	70918A	525.00
Side flaps 1 set of 2 - Compatible with extensions	355.00	70914A	355.00	70914A
Depth control wheels - 1 set of 2 (400 x 200 mm)	735.00	70945A	735.00	70945A
Snow blade	L = 2,00 m	355.00	70934A	-
	L = 2,50 m	420.00	70913A	420.00
	L = 3,00 m	-	-	475.00

MODELS	Price	Reference	Price	Reference
	BULL 2,00 M		BULL 2,50 M	
BULL BLADE (Without coupling)	4100.00	70953A	4330.00	70954A
COUPLING HITCH > OBLIGATORY TO DETERMINE				
• 3-point front linkage	1435.00	70960A	1425.00	70960A
• Farm loader, telehandler, backhoe loader, loader, compact loader	935.00	76136F	935.00	76136F
• Forklift elevator	485.00	72505A	485.00	72505A
OPTIONS				
Hydraulic tilting (+/- 20°)	960.00	70955A	960.00	70955A
Hydraulic rotation (34° right / 41° left)	1195.00	70908A	1195.00	70908A
Extension 25 cm	Right	525.00	70906A	525.00
	Left	525.00	70918A	525.00
Side flaps 1 set of 2 - Compatible with extensions	355.00	70914A	355.00	70914A
Depth control wheels - 1 set of 2 (400 x 200 mm)	735.00	70945A	735.00	70945A
Snow blade	L = 2,00 m	345.00	70934A	-
	L = 2,50 m	420.00	70913A	420.00
	L = 3,00 m	-	-	495.00
Safety valve on cylinder for open centre circuit (Merlot, Bobcat, Fdi-sambron, Kubota skidsteer...)	255.00	70993A	255.00	70993A

MODEL	Price	Reference
FORKLIFT BLADE SPECIAL FOR SNOW With fork holder adapter	2005.00	70958A





HEAVY DUTY 2,50 m



HEAVY DUTY 2,50 m



HEAVY DUTY 2,50 m



Rabaud advantages

- Allows many applications :
 - Levelling dirt and forest roads,
 - Cleaning of yards, loose stalls and roads,
 - Backfilling ditches and drainage trenches,
 - Ditch creation and cleaning,
 - Earthworks and levelling,
 - Snow removal.
- 3 mechanical movements as standard (rotation, offset and tilt). Hydraulic movements available as an option.
- Floating position at inclination to follow the road.
- Upgradeable range with numerous options.
- Interchangeable wear knife made of special steel.
- More robustness for intensive work : frame design with rounded, thick beam (on model STANDARD and HEAVY DUTY).


Technical characteristics

MODELS	HEAVY DUTY 2,00 m	HEAVY DUTY 2,50 m
Coupling	3-point cat. N°2 and N°3	
Blade width	2,00 m	2,50 m
Tractor power	90 up to 150 HP	
Total weight (without option)	650 kg	765 kg
Height	0,60 m	
Ø swivelling axle	100 mm	
Blade rotation	+/- 45° (mechanical) / 20° right and 28° left (hydraulic) Possibility to turn it around	
Offset	+/- 30° (mechanical) / 33° right and 28° left (hydraulic)	
Tilting	20° (mechanical) / 20° (hydraulic)	



Standard equipment

- Interchangeable wear blades in special steel.
- Mechanical rotation +/-45° (it can be turned around).
- Mechanical offset +/- 30°.
- Mechanical tilting 20°.
- Robust frame for high-power tractors.
- 3-point linkage.
- Stands for storage.

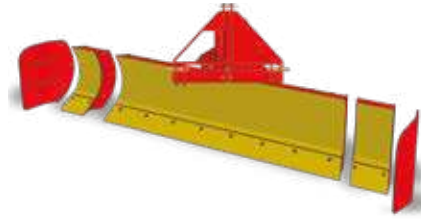

Options : side flaps and/or 25 cm extensions left / right




Options : depth control wheels (a pair) and/or hydraulic wheels on heavy duty blade.

		Price	Reference	Price	Reference
MODELS		HEAVY DUTY 2,00 M		HEAVY DUTY 2,50 M	
HEAVY DUTY BLADE					
3 serial movements : offset, rotation, tilting 3-point linkage		6430.00	70943A	6685.00	70944A
OPTIONS					
Hydraulic rotation without valve		910.00	70930A	910.00	70930A
Hydraulic offset without valve		735.00	70931A	735.00	70931A
Hydraulic tilting without valve		735.00	70936A	735.00	70936A
Extension of 25 cm long (right or left) - the unit		485.00	70967A	485.00	70967A
Hydraulic valve dual-acting with support, hydraulic hoses	1-way valve dual-acting	565.00	70939A	565.00	70939A
	2-way valve dual-acting	705.00	70940A	705.00	70940A
	3-way valve dual-acting	870.00	70941A	870.00	70941A
	4-way valve dual-acting	960.00	70963A	960.00	70963A
	5-way valve dual-acting	1075.00	70992A	1075.00	70992A
Electro-hydraulic valve with handles - 3-way valve dual-acting		2545.00	70961A	2545.00	70961A
Side flaps 1 set of 2 - Compatible with extensions		330.00	70915A	330.00	70915A
Depth control wheels - 1 set of 2	400 x 200 mm	735.00	70945A	735.00	70945A
	600 x 200 mm - WARNING not suitable on 2,00 M BLADE if cylinder for tilting and front mounting	1645.00	70911A	1645.00	70911A
	600 x 200 mm hydraulics WARNING not suitable on 2,00 m BLADE if cylinder for tilting and front mounting - 2 dual-acting necessary	3140.00	70962A	3140.00	70962A
Snow blade	L = 2,00 m	340.00	70950A	-	-
	L = 2,50 m	420.00	70916A	420.00	70916A
	L = 3,00 m	-	-	490.00	70925A

3 MOVEMENTS OF GRADER BLADES



Rotation

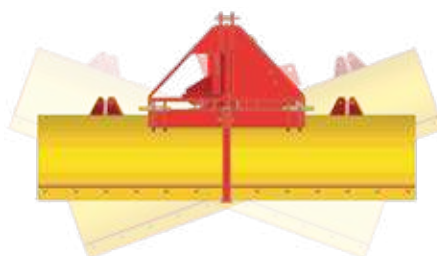

Tilting



Offset