

SM SERIES

The SM mulching head for mini excavators from 3.5 to 8 tons is ideal for clearing grass and shrubs.

Compact and robust, it is versatile for use in the construction and green maintenance sectors.



INFO

PRICE LIST


SM90	SM110	SM130
£3,390	£3,560	£3,765

STANDARD EQUIPMENT

Compact and robust design	Internal toothed bar that helps finely shred the material
Housing with double-layer bottom cavity, reinforced up to the connection point with the front chains for greater impact resistance	Rear flap in reinforced multi-layer tear-resistant rubber
Spherical roller bearings which, thanks to a special labyrinth sealing system, are better protected against impurities	Support roller with through shaft for greater resistance to thrust
Rotor with knives or hammers on fixed mounts for improved material shredding	CE-compliant safety guards
Spiral arrangement of the tools for improved cutting performance	Bolted steel plate for mounting the machine attachment (unpainted)
Direct drive	Interchangeable support skids
Valve block with flow regulator, shock relief, anti-cavitation and maximum pressure valve (no drain line required and allows up to 10 BAR back pressure on the drain)	High-quality coating for greater resistance to impacts and wear
Possibility to equip the rotor with hammers or Y-blades plus a central blade	Adjustable cutting height via support roller

For a complete list of all the standard features of this mulcher, scan the QR code at the top of the page or visit qm-agri.com

	Excavator tons	Oil Flow l min/max	Max Press. bar	A mm	B mm	C mm	D (cutting) mm	Weight kg	Transmission	Kn. / Hm. n°	Ø Max Cut cm
SM90	3.5/5.0	35/60	250	1130	785	460	900	215	direct	12	8
SM110	5.0/7.0	45/70	250	1330	785	460	1100	240	direct	14	8
SM130	6.0/8.0	50/80	250	1530	785	460	1300	265	direct	16	8

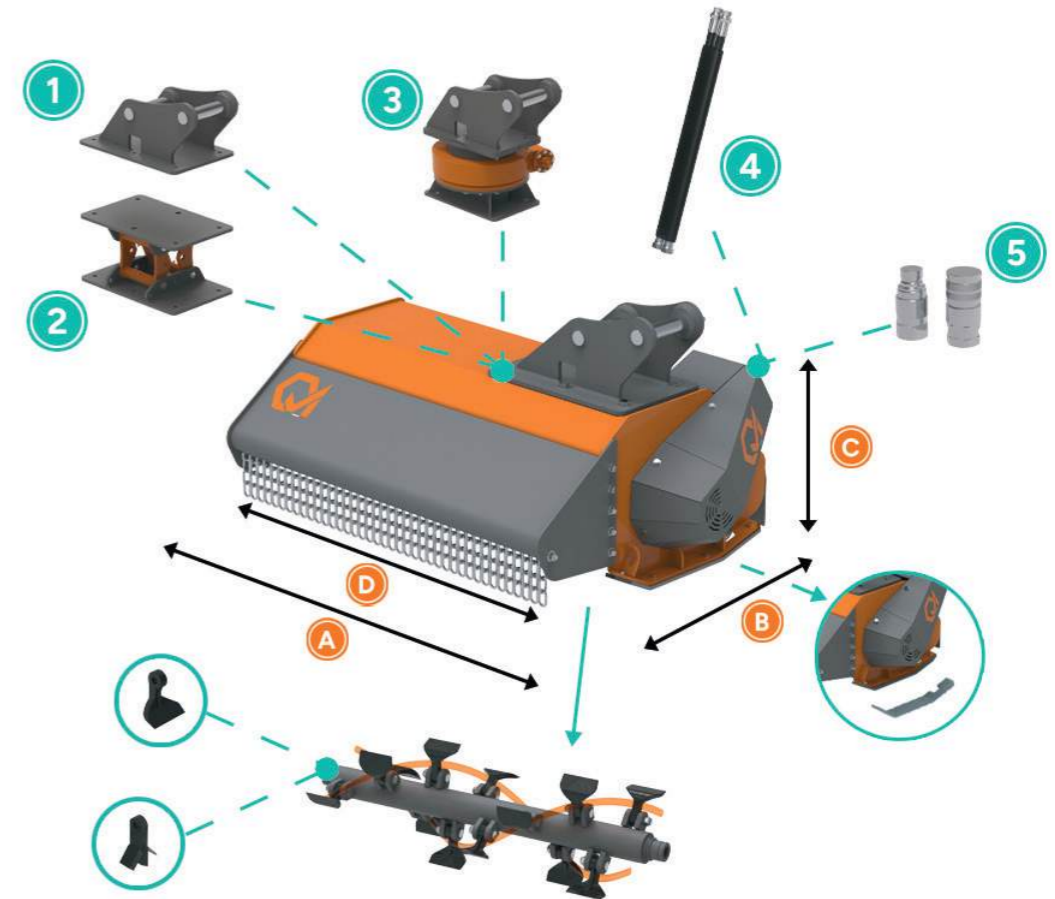

OPTIONAL EQUIPMENT

1	MACHINE MOUNT WITH PINS INCLUDED	
	For excavators from 3.0/4.0 tons	£250
	For excavators from 4.0/5.0 tons	£280
	For excavators from 5.0/6.0 tons	£330
2	SELF-LEVELLING FLOATING	
	AF2 (weight 48kg)	£440
3	HYDRAULIC ROTATION SLEW RING KIT	
	Hydraulic slewing ring (4 hoses) - Weight 108kg	£2,630
4	HYDRAULIC LINE KIT*	
	Hose 1/2" (L=2000)	£135
	Hose 3/4" (L=2000)	£160
5	FLAT FACE QUICK COUPLERS**	
	Couplers 1/2"	£85
	Couplers 3/4"	£200

* Different lengths from those indicated can be supplied upon request.
 ** Different quick couplers from those indicated can be supplied upon request.
 *** Machine mount prices refer to the initial mounting of the attachment.

All data are intended WITHOUT MACHINE MOUNT. Dedicated machine mounts available upon request.