

SR SERIES

The SR mulching head, for excavators from 4 to 14 tons, is designed to deliver high performance and excellent reliability in professional applications. Its robust and well-balanced structure ensures productivity and continuous operation even in the most demanding jobs.

Compact and powerful, it is a versatile solution for the maintenance of grass, brambles and shrubs.



INFO

PRICE LIST

| SR90 | SR110 | SR130 | SR160 |
|--------|--------|--------|--------|
| £5,000 | £5,270 | £5,570 | £6,045 |

STANDARD EQUIPMENT


| | |
|---|--|
| Compact and robust design | Internal toothed bar that helps finely shred the material |
| Housing with double-layer bottom cavity, reinforced up to the connection point with the front chains for greater impact resistance | Rear flap in reinforced multi-layer tear-resistant rubber |
| Spherical roller bearings which, thanks to a special labyrinth sealing system, are better protected against impurities | Support roller with through shaft for greater resistance to thrust |
| Rotor with knives or hammers on fixed mounts for improved material shredding | CE-compliant safety guards |
| Spiral arrangement of the tools for improved cutting performance | Bolted steel plate for mounting the machine attachment (unpainted) |
| Toothed V-belt Drive | Interchangeable support skids |
| Valve block with flow regulator, shock relief, anti-cavitation and maximum pressure valve (no drain line required and allows up to 10 BAR back pressure on the drain) | High-quality coating for greater resistance to impacts and wear |
| Possibility to equip the rotor with hammers or Y-blades plus a central blade | Adjustable cutting height via support roller |

For a complete list of all the standard features of this mulcher, scan the QR code at the top of the page or visit qm-agri.com

| | Excavator tons | Oil Flow l min/max | Max Press. bar | A mm | B mm | C mm | D (cutting) mm | Weight kg | Transmission | Kn. / Hm. n° | Ø Max Cut cm |
|-------|----------------|--------------------|----------------|------|------|------|----------------|-----------|--------------|--------------|--------------|
| SR90 | 4.0/6.0 | 45/90 | 250 | 1070 | 815 | 550 | 900 | 355 | 3 belts | 10 | 12 |
| SR110 | 6.0/10.0 | 60/110 | 250 | 1270 | 815 | 550 | 1100 | 395 | 3 belts | 12 | 12 |
| SR130 | 10.0/12.0 | 70/120 | 250 | 1470 | 815 | 550 | 1300 | 475 | 3 belts | 14 | 12 |
| SR160 | 12.0/14.0 | 90/140 | 250 | 1770 | 815 | 550 | 1600 | 555 | 3 belts | 16 | 12 |



AVAILABLE FOR:

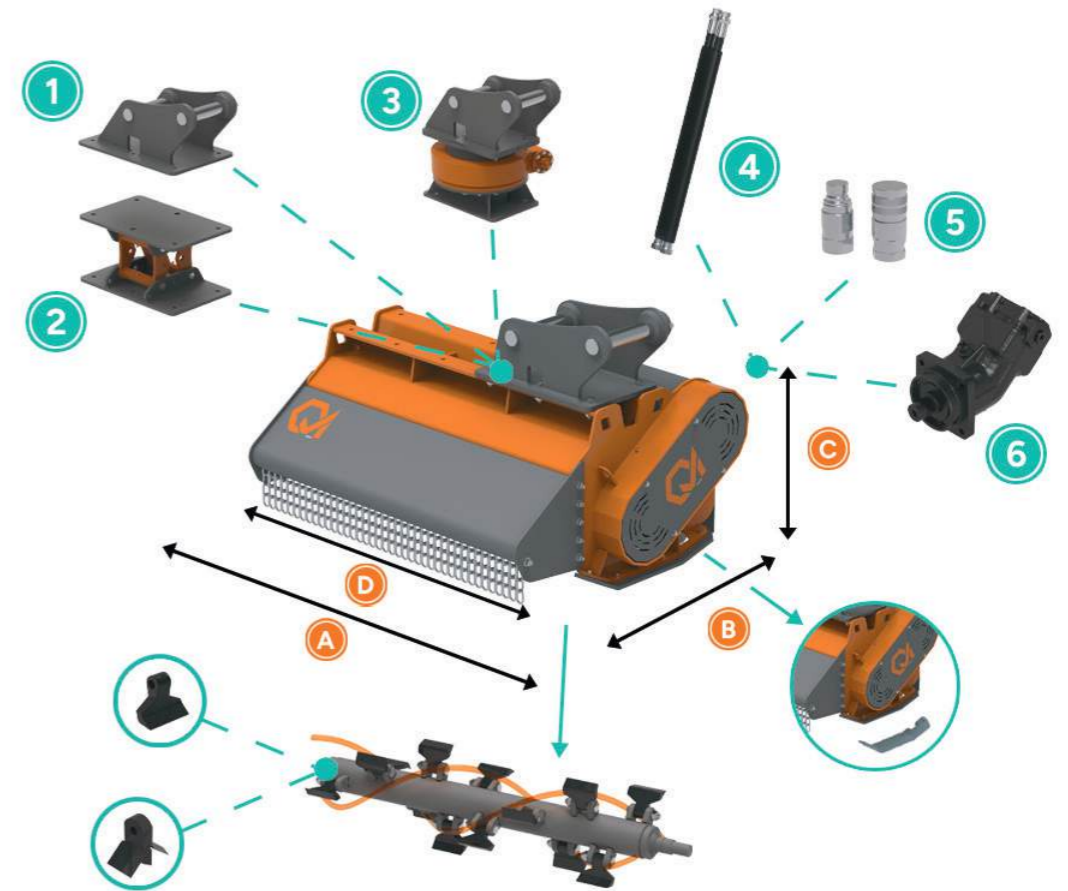

OPTIONAL EQUIPMENT

| | | |
|---|---|--------|
| 1 | MACHINE MOUNT WITH PINS INCLUDED | |
| | For excavators from 4.0/5.0 tons | £280 |
| | For excavators from 5.0/6.0 tons | £330 |
| | For excavators from 6.0/8.0 tons | £375 |
| | For excavators from 8.0/10.0 tons | £435 |
| 2 | SELF-LEVELLING FLOATING | |
| | AF2 (for SR90 and SR110 - weight 48kg) | £440 |
| | AF3 (for SR130 and SR160 - weight 88kg) | £730 |
| 3 | HYDRAULIC ROTATION SLEW RING KIT | |
| | Hydraulic slewing ring (4 hoses) - Weight 162kg | £3,100 |
| 4 | HYDRAULIC LINE KIT* | |
| | Hose 1/2" (L=2000) | £135 |
| 5 | FLAT FACE QUICK COUPLERS** | |
| | Couplers 1/2" | £85 |
| 6 | PISTON MOTOR | |
| | Piston motor with external drain | £1,810 |
| | For excavators from 10.0/12.0 tons | £505 |
| | For excavators from 12.0/14.0 tons | £575 |
| | Hose 3/4" (L=2000) | £160 |

* Different lengths from those indicated can be supplied upon request.
 ** Different quick couplers from those indicated can be supplied upon request.
 *** Machine mount prices refer to the initial mounting of the attachment.

All data are intended WITHOUT MACHINE MOUNT. Dedicated machine mounts available upon request.