

RF SERIES

The RF mulching head for skid loaders and wheel loaders is designed for the maintenance and clearing of large areas. The QM self-levelling system keeps the mulcher closer to the machine, improving stability and visibility during operation.

The opening front hood allows more effective handling of vegetation and bulkier material.




PRICE LIST		
RF160	RF185	RF210
£9,910	£10,720	£11,740

STANDARD EQUIPMENT

Compact and robust design that improves visibility from the operator's cab.	Reinforced front hood with double-layer cavity for greater impact resistance
Spherical roller bearings which, thanks to a special labyrinth sealing system, are better protected against impurities	Adjustable hood opening
Housing with double-layer cavity bottom	Valve block with flow regulator, shock relief, anti-cavitation and maximum pressure valve (no drain line required and allows up to 10 BAR back pressure on the drain)
Rotor with knives or hammers on fixed mounts for improved material shredding	Bilateral mechanical side shift
Spiral arrangement of the tools for improved cutting performance	Possibility to equip the rotor with hammers or Y-blades
Toothed V-belt Drive with customizable Drive ratio	Support roller with through shaft for greater resistance to thrust
Internal toothed bar that helps finely shred the material	CE-compliant safety guards
Rear flap in reinforced multi-layer tear-resistant rubber	Self-levelling system to adapt to the ground.
Interchangeable support skids	Skid Loader SAE J2513 universal mount
Hydraulic hoses L=2500	
Adjustable cutting height via support roller	

For a complete list of all the standard features of this mulcher, scan the QR code at the top of the page or visit qm-agri.com

	Oil Flow	Max Press.	A	B	C	D(cutting)	Weight	Transmission	Kn. / Hm.	Ø Max Cut
	l min/max	bar	mm	mm	mm	mm	kg	-	n°	cm
RF160	50/110	250	1790	1160	610	1600	690	3 belts	16	10
RF185	70/120	250	2040	1160	610	1850	750	3 belts	18	10
RF210	90/140	250	2290	1160	610	2100	815	3 belts	20	10

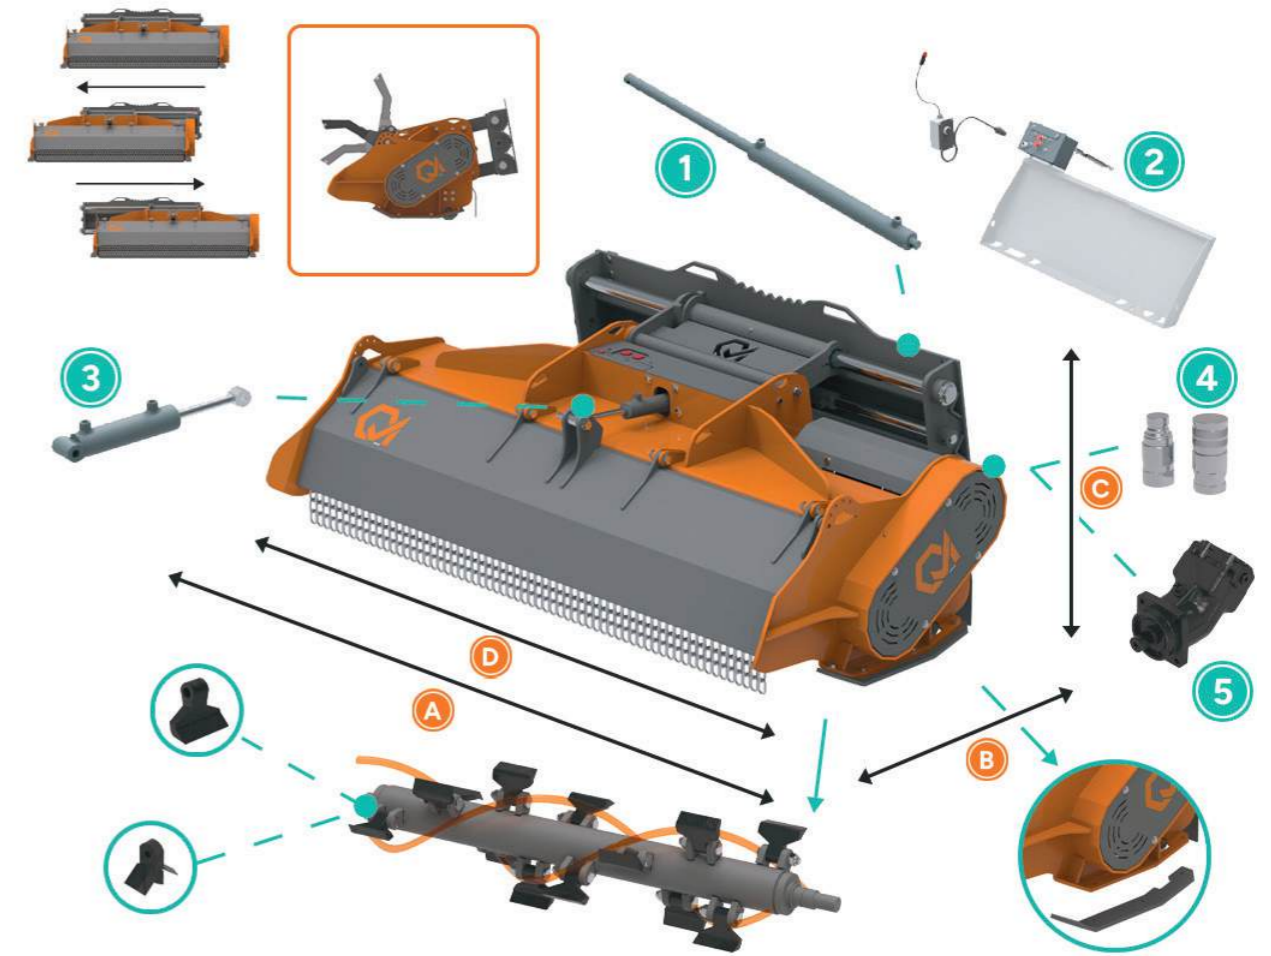

OPTIONAL EQUIPMENT

1	HYDRAULIC SIDE SHIFT KIT Allows the mulching head to slide 400 mm to the right by means of a hydraulic cylinder using a double hydraulic line (hydraulic hoses included)	£550
2	ELECTRO-HYDRAULIC SIDE SHIFT AND HOOD OPENING KIT**** Allows the mulching head to slide 400 mm to the right and the front hood to open via electric control (hydraulic cylinders included)	£1,585
3	HYDRAULIC HOOD OPENING (can only be combined with manual side shift) Actuation by hydraulic cylinder via double hydraulic line	£645
4	FLAT FACE QUICK COUPLERS** Couplers 1/2" Couplers 3/4" Couplers 1"	£85 £200 £325
5	PISTON MOTOR Piston motor with external drain	£1,810

* 8 or 14-pin electrical connections for electro-control available upon request.
 * Different lengths from those indicated can be supplied upon request.
 ** Different quick couplers from those indicated can be supplied upon request.
 **** Please specify the carrier machine voltage (12 or 24 V).

All data are intended WITHOUT MACHINE MOUNT. Dedicated machine mounts available upon request.