

RS SERIES

The RS mulching head for skid loaders and wheel loaders is designed for the maintenance and clearing of large areas.

The QM self-levelling system keeps the mulcher closer to the machine, improving stability and visibility during operation.

Robust and reliable, it is ideal for managing grass, brambles and shrubs in professional applications.



INFO

PRICE LIST

RS160	RS185	RS210
£8,055	£8,695	£9,495

STANDARD EQUIPMENT

Compact and robust design that improves visibility from the operator's cab.

Spherical roller bearings which, thanks to a special labyrinth sealing system, are better protected against impurities

Bilateral mechanical side shift

Rotor with knives or hammers on fixed mounts for improved material shredding

Toothed V-belt drive with customizable drive ratio

Valve block with flow regulator, shock relief, anti-cavitation and maximum pressure valve (no drain line required and allows up to 10 BAR back pressure on the drain)

Support roller with through shaft for greater resistance to thrust

Hydraulic hoses L=2500

CE-compliant safety guards

Self-levelling system to adapt to the ground.

Housing with double-layer bottom cavity, reinforced up to the connection point with the front chains for greater impact resistance

Spiral arrangement of the tools for improved cutting performance

Possibility to equip the rotor with hammers or Y-blades

Internal toothed bar that helps finely shred the material

Rear flap in reinforced multi-layer tear-resistant rubber

Interchangeable support skids

High-quality coating for greater resistance to impacts and wear


Adjustable cutting height via support roller

Skid Loader SAE J2513 universal mount

For a complete list of all the standard features of this mulcher, scan the QR code at the top of the page or visit qm-agri.com

	Oil Flow	Max Press.	A	B	C	D (cutting)	Weight	Transmission	Kn. / Hm.	Ø Max Cut
	l min/max	bar	mm	mm	mm	mm	kg	-	n°	cm
RS160	50/100	250	1790	1160	610	1600	705	3 belts	16	10
RS185	70/120	250	2040	1160	610	1850	765	3 belts	18	10
RS210	90/140	250	2290	1160	610	2100	830	3 belts	20	10

AVAILABLE FOR:

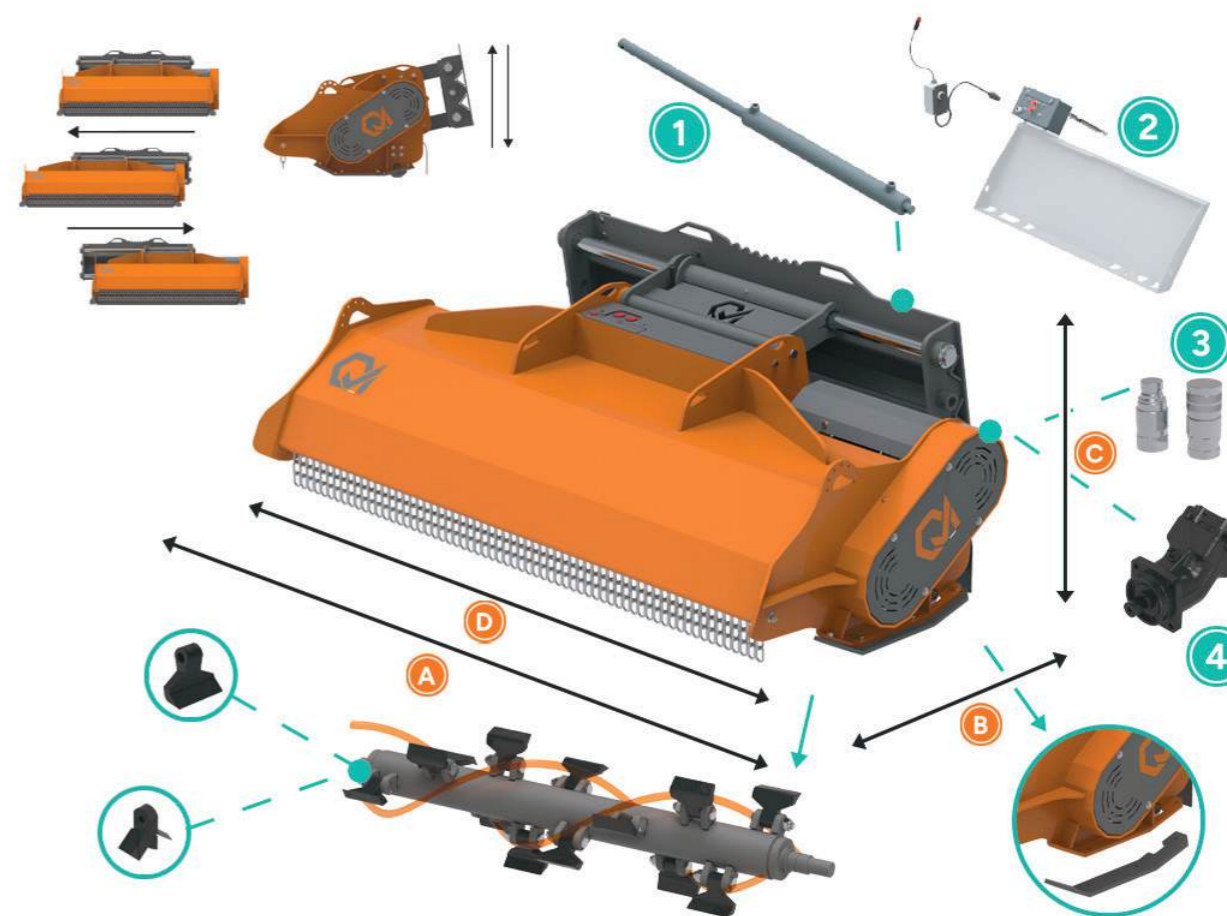

OPTIONAL EQUIPMENT

1	HYDRAULIC SIDE SHIFT KIT	Allows the mulching head to slide 400 mm to the right by means of a hydraulic cylinder using a double hydraulic line (hydraulic hoses included)	£550
2	ELECTRO-HYDRAULIC SIDE SHIFT KIT****	Allows the mulching head to slide 400 mm to the right by means of an electric control using a single hydraulic line (hydraulic cylinder included)	£950
3	FLAT FACE QUICK COUPLERS**	Couplers 1/2"	£85
		Couplers 3/4"	£200
		Couplers 1"	£325
4	PISTON MOTOR	Piston motor with external drain	£1,810

* Different lengths from those indicated can be supplied upon request.
 * 8 or 14-pin electrical connections for the electro-control available upon request.
 ** Different quick couplers from those indicated can be supplied upon request.
 **** Please specify the carrier machine voltage (12 or 24 V).

All data are intended WITHOUT MACHINE MOUNT. Dedicated machine mounts available upon request.