



WINDY 491 RE - Hydraulic installation



WINDY 491 RE



WINDY 491 RE



#### Rabaud advantages


- The WINDY 491 RE hoover can be fitted quickly to the side panel, and can be lifted by a single person, thanks to the integrated hydraulic lifting transport trolley = Reduced risk of RSI (Musculoskeletal Disorders) for the user, no effort required.
- Driven by internal combustion engine.
- Big diameter turbine for more air flow. Turbine casing 5-year WARRANTY.
- Safety: Turbine stops in less than 10 seconds thanks to the hydraulic brake.
- Side shifted rotor to avoid accumulation and therefore early stuffing, with easy removable blades.
- 5 m sleeve mounted on swiveling support with handle and wheels.
- Adjustable chute inclination to direct sprays into the hopper.
- No maintenance for the bearing: already lubricated for life.
- Discover in option the CASING KIT to keep all the collected waste in your tipper.

#### Technical characteristics

MODEL	WINDY 491 RE
<i>Turbine diameter</i>	490 mm
<i>Rotor diameter</i>	402 mm
<i>Blades number</i>	6 removable blades
<i>Sleeve</i>	5 m, Ø 200 mm
<i>Dimensions (L x W x H)</i>	1,05 x 1,75 x 1,78 m
<i>Weight</i>	260 kg
<i>Coupling</i>	Side panel (1.20 m to 1.70 m height Thickness from 15 to 80 mm)
<i>Drive Motor power</i>	Petrol heat engine BRIGGS & STRATTON 10.5 kW / 14 HP With electric starter 3-year warranty

#### Standard equipment

- Large diameter turbine with removable blades.
- Turbine volute (5-year warranty).
- Volute in CREUSABRO 8000 and blades in Hardox 300.
- 5 m sucking sleeve, Ø 200 mm.
- Transport trolley integrated on the WINDY 491 RE. With 2 braked swivel wheels and 2 fixed wheels, self-locking system on the side panel.

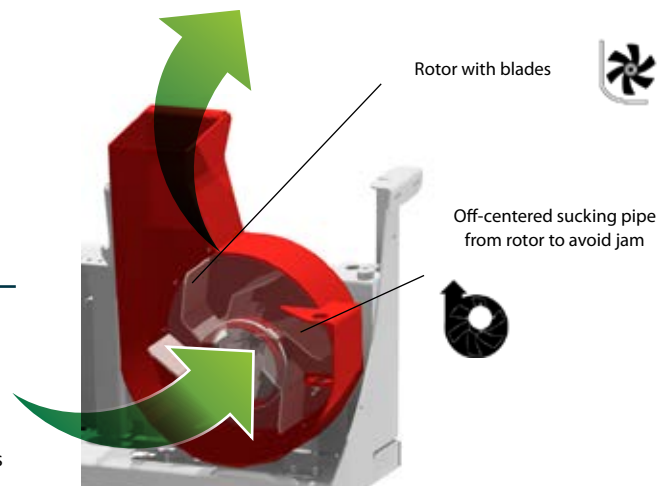

**5** YEAR **VOLUTE WARRANTY**



	Price	Reference
<b>MODELS</b>		
<b>WINDY 491 RE</b> • Petrol heat engine BRIGGS & STRATTON 10.5 kW / 14 HP (3-year WARRANTY) - Electric start - Self-locking system on tailgate	<b>7590.00</b>	73934A
<b>OPTIONS</b>		
Road signs kit	<b>270.00</b>	73933A
Mounting on sidebar with banging doors - (consult us)	<b>485.00</b>	73935A
Presence sensor of the suction sleeve	<b>280.00</b>	73941A
Tachometer on internal combustion engine (rev counter with hour meter)	<b>190.00</b>	99151A
<b>SPARE PARTS</b>		
Blade - unit	<b>33.00</b>	739204
Sucking sleeve Ø 200 mm - Value for 1 m - Delivered in 5 m or 10 m	<b>92.00</b>	32A131



Hydraulic set-up at the rear of the truck, only 1 operator needed



	Price	Reference
<b>CASING KIT FOR DUMP TRUCK</b>		
<b>CASING KIT FOR DUMP TRUCK - 3.5 T max. vehicle</b> Tarpaulin made of PVC 350 g/m <sup>2</sup> - Tipping length min. 2.55 m and max. 4.25 m - Tipping width mini. 1.60 m and max. 2.45 m - Height of the kit : 1.67 m - To use with vacuum cleaner, wood shredder...	<b>1955.00</b>	73914A

### ZOOM : CASING KIT FOR DUMP TRUCK



Casing kit for dump truck



Less than one hour for mounting



Casing kit door opening for unloading