

# SL SERIES

The SL mulching head for mini excavators from 0.8 to 4 tons is ideal for clearing grass and shrubs, even in confined spaces.

Compact and robust, it is suitable for both amateur and professional use.




PRICE LIST		
SL50	SL70	SL90
£2,695	£2,800	£2,915

## STANDARD EQUIPMENT

Compact and robust design	Internal toothed bar that helps finely shred the material
Housing with double-layer bottom cavity, reinforced up to the connection point with the front chains for greater impact resistance	Rear flap in reinforced multi-layer tear-resistant rubber
Spherical roller bearings which, thanks to a special labyrinth sealing system, are better protected against impurities	Support roller with through shaft for greater resistance to thrust
Rotor with knives or hammers on fixed mounts for improved material shredding	CE-compliant safety guards
Spiral arrangement of the tools for improved cutting performance	Bolted steel plate for mounting the machine attachment (unpainted)
Direct drive	Interchangeable support skids
Valve block with flow regulator, shock relief, anti-cavitation and maximum pressure valve (no drain line required and allows up to 10 BAR back pressure on the drain)	High-quality coating for greater resistance to impacts and wear
Possibility to equip the rotor with hammers or Y-blades (612€)	Adjustable cutting height via support roller

For a complete list of all the standard features of this mulcher, scan the QR code at the top of the page or visit [qm-agri.com](http://qm-agri.com)

	Excavator tons	Oil Flow l min/max	Max Press. bar	A mm	B mm	C mm	D (cutting) mm	Weight kg	Transmission	Kn. / Hm. n°	Ø Max Cut cm
SL50	0.8/1.8	12/24	250	680	645	360	500	90	direct	10	4
SL70	1.8/3.0	18/35	250	880	645	360	700	105	direct	14	4
SL90	3.0/4.0	25/40	250	1080	645	360	900	120	direct	18	4

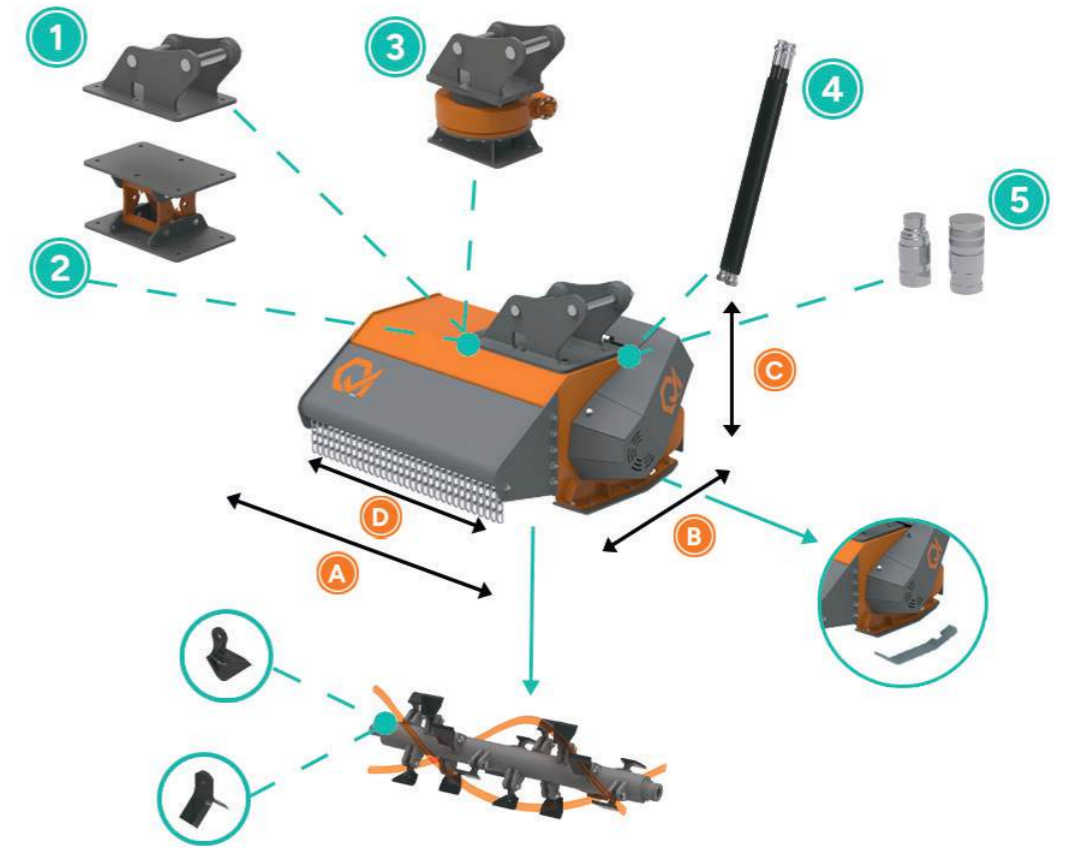

## OPTIONAL EQUIPMENT

1	<b>MACHINE MOUNT WITH PINS INCLUDED</b>	
	For excavators from 0.8/1.8 tons	£210
	For excavators from 1.8/3.0 tons	£225
	For excavators from 3.0/4.0 tons	£250
2	<b>SELF-LEVELLING FLOATING</b>	
	AF1 (weight 22kg)	£320
3	<b>HYDRAULIC ROTATION SLEW RING KIT</b>	
	Hydraulic slewing ring (4 hoses) - Weight 96kg	£2,630
4	<b>HYDRAULIC LINE KIT*</b>	
	Hose 3/8" (L=1500)	£95
	Hose 1/2" (L=1500)	£110
5	<b>FLAT FACE QUICK COUPLERS**</b>	
	Couplers 3/8"	£68
	Couplers 1/2"	£85

\* Different lengths from those indicated can be supplied upon request.  
 \*\* Different quick couplers from those indicated can be supplied upon request.  
 \*\*\* Machine mount prices refer to the initial mounting of the attachment.

All data are intended WITHOUT MACHINE MOUNT. Dedicated machine mounts available upon request.